



Integrating plastic technologies
since 1965

INCLINED BELT CONVEYORS

CB Series




Model CB-6

The CB series conveyors feature reliable performance and ease of operation, and are suitable for conveying sprues or finished product to a higher level beside the moulding machine.


The angle and height of conveyor is adjustable to suit requirements.

FEATURES:

- Mounted on patented "FUTURE" model support stand
- Non-slip PU belt with flights height 20mm, pitch 500mm
- Sidewalls with 95mm height
- Fixed speed of 4 metres/minute
- Height adjustable support legs
- Three phase motor with gearbox for voltages 230/400/460/575V, frequency 50/60Hz

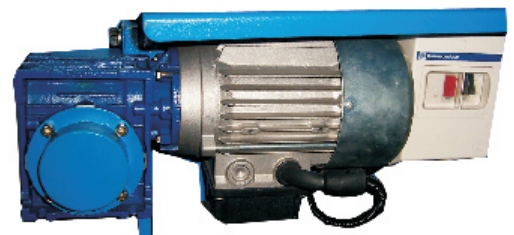

Gear motor and control unit

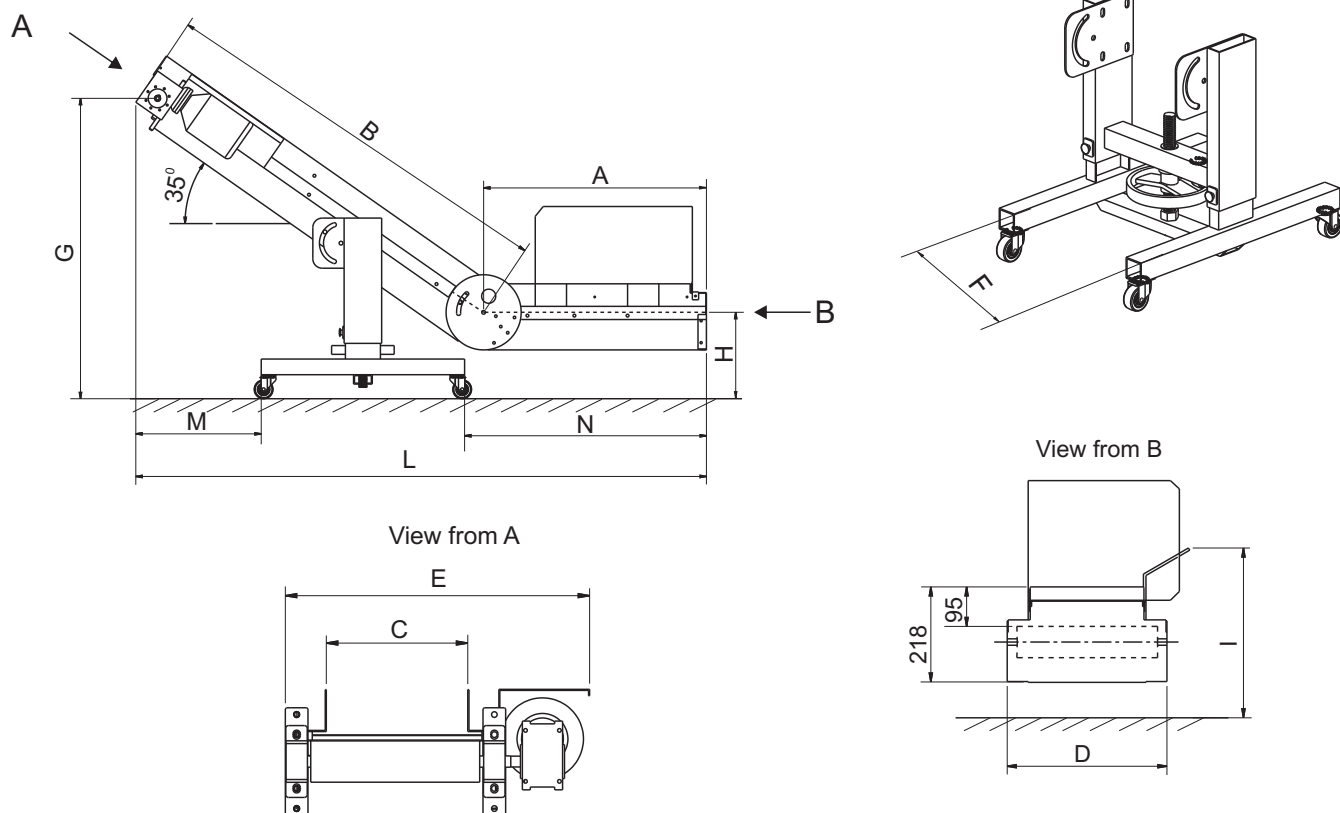

DIMENSIONS:

Model	CB-1	CB-2	CB-3	CB-4	CB-5	CB-6
A	690	690	690	690	690	690
B	1300	1300	1300	1800	1800	1800
C	250	320	450	250	320	450
D	359	429	559	359	429	559
E	540	610	740	540	610	740
F	483	553	683	483	553	683
G	905 + 65	905 + 65	905 + 65	1128 + 145	1128 + 145	1128 + 145
H	257 + 65	257 + 65	257 + 65	192 + 145	192 + 145	192 + 145
I	400 + 65	400 + 65	400 + 65	335 + 145	335 + 145	335 + 145
L	1810	1810	1810	2220	2220	2220
M	505	505	505	651	651	651
N	845	845	845	909	909	909
Weight (kg)	92	102	112	100	110	120