



Integrating plastic technologies  
since 1965

# PERIPHERAL PUMPS

## SAL-UG series

For small to medium material conveying jobs, nothing beats the simplicity of a peripheral vacuum pump from Hamilton. Peripheral pumps utilize a one piece fan/turbine unit to produce a reliable vacuum source for one to several loaders.

If short, frequent loading cycles are anticipated, the pumps are equipped with a continuous run valve, that allows the pump to continuously run between loading cycles, eliminating start/stop cycles.

### FEATURES:

- Pump motor requires no maintenance: permanently lubricated to reduce down time
- Quiet operation: requires no sound proofing
- Reliable components: includes a magnetic starter and overload protection
- Main voltage disconnect
- Continuous run valve: eliminates frequent starting and stopping of the pump motor
- Integrated pump protection prefilter
- Larger models available upon request




**SAL-5HP-UG**




**SAL-1HP-UG**

# SPECIFICATIONS:


Model	HP	CFM	Inch HG	Line size	Dimensions	Weight
SAL-1HP	1	26	3.5	1.5	25.75 x 14.5 x 16	150
SAL-2HP	2	60	5	1.5	26 x 14.5 x 16	150
SAL-3.5HP	3.5	100	5	2	52 x 16.5 x 21.5	290
SAL-5HP	5	125	5	2	52 x 16.5 x 21.5	385
SAL-7.5HP	7.5	250	5	2	67 x 23 x 23.5	400
SAL-10HP	10	300	5	2	67 x 23 x 23.5	410
SAL-15HP	15	450	5	2.5	82.5 x 27 x 31.5	500

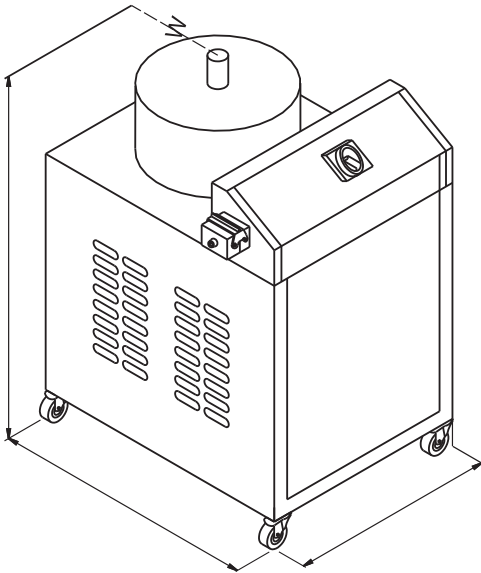

1 &amp; 2HP

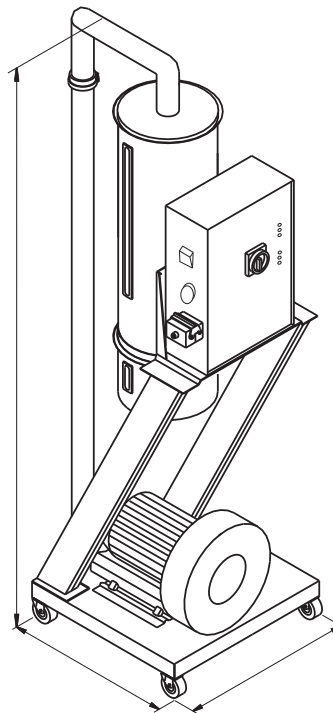

3.5 &amp; 5HP

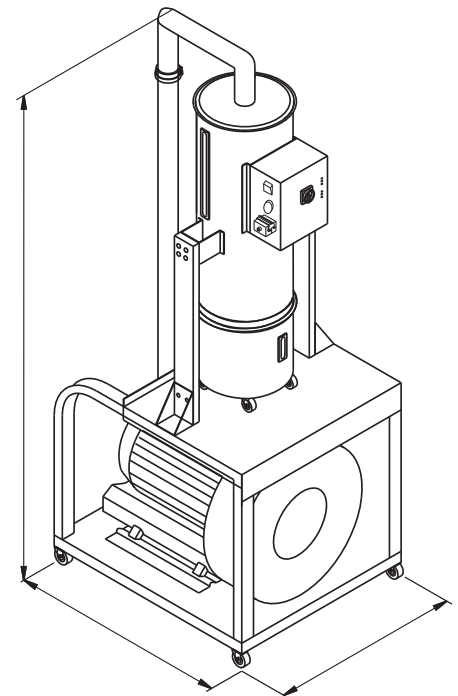

7.5~15HP